



ZERO CLEARANCE SHUTTERS WITH CUTOUT

Option #1:
Louvers have full
range of motion.


¼" backer
material at
cutout.

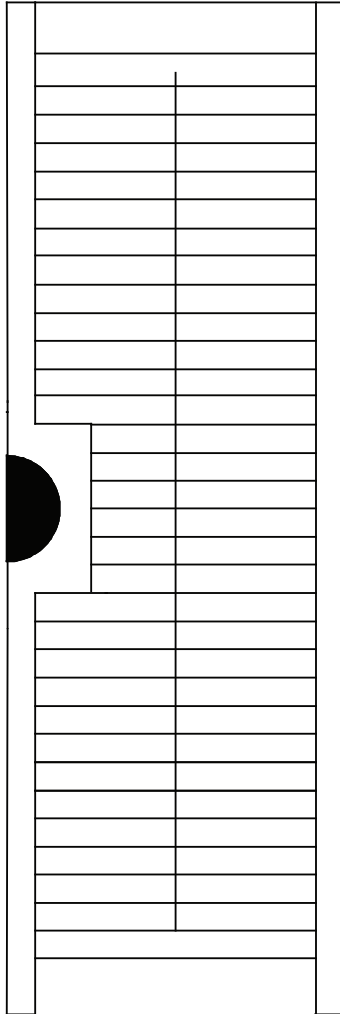

Option #2:
Louvers open to
90° and then close
upward.

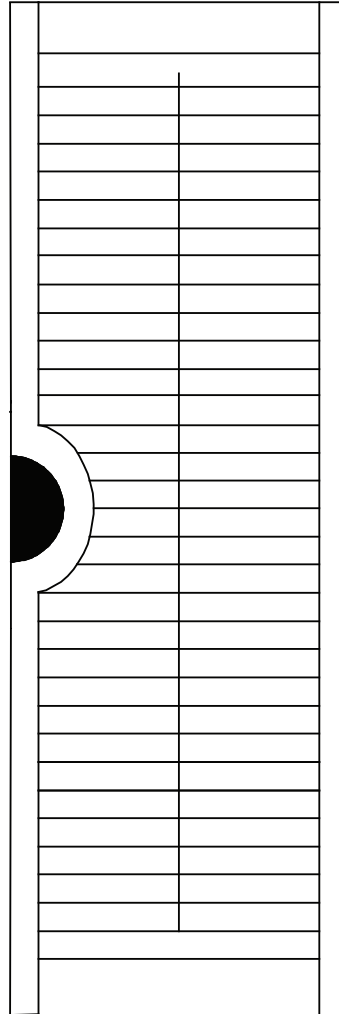

Measurements needed for Zero Clearance panels with cutout
Cutout will be a true radius. Size is determined by Summit Hill based on dimension (D).
Glass stop moulding must be flush with door surface.

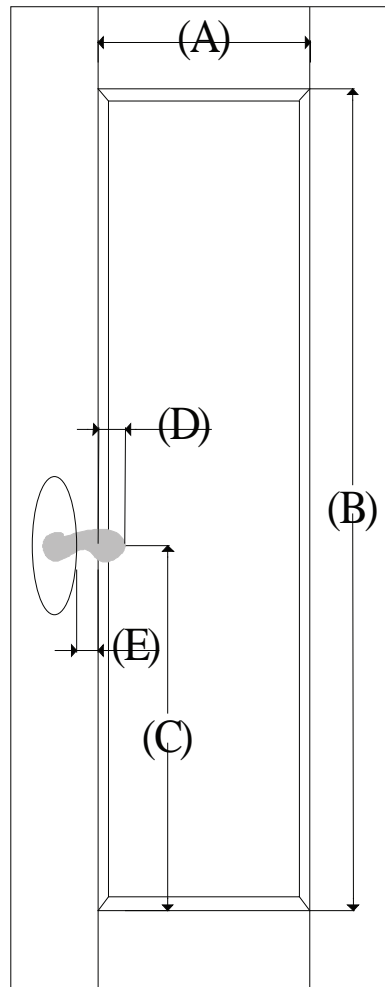

- (A) Glass width including stop moulding: _____
- (B) Glass height including stop moulding: _____
- (C) Dimension from bottom edge of stop moulding to center of handle: _____
- (D) Dimension from outer edge of stop moulding to end of handle: _____
- (E) Dimension from outer edge of stop moulding to edge of handle back plate: _____
- (F) Note if handle is on left or right: _____